

The No Leak Skylight No Leak Promise No Worries

Deck mounted skylights

Bringing ligh

10-year installation warranty. VELUX flashing required to qualify.



3 layers of water protection for deck mounted skylights

1 The pre-attached deck seal on all deck mounted skylights provides a seal between the frame and roof deck for a leak-proof installation.

- 2 Adhesive underlayment for secondary water protection against the harshest weather conditions.
- 3 Engineered flashing for easy installation and primary water protection.

VELUX flashing must be purchased in order to qualify for the 10-year installation warranty.



Solar Powered "Fresh Air" Skylight – Model VSS

- Optional in-stock blinds available factory installed.
- The solar panel will work on cloudy days and with indirect light. It does not have to be exposed to direct sunlight to function.

Comes complete with cut to size filler pieces for the drywall return groove. When replacing an existing skylight.

- With an integrated rain sensor the solar powered skylight will close automatically, in case of inclement weather.
- Included with your skylight is the intelligent touch remote control powered by VELUX INTEGRA[®]. Comes with preprogrammed settings for ease of use.

* For more information visit www.veluxusa.com/taxcredits



Manual "Fresh Air" skylight – Model VS

- Optional in-stock blinds available factory installed.
- Features pre-finished white wood frame and protective aluminum or copper cladding.
- Smooth-turning handle available for when the skylight is installed within reach.

Fixed skylight – Model FS

available factory installed.

• Features pre-finished white

• Streamlined exterior profile

wood frame and protective

aluminum or copper cladding.

does not obstruct your roofline.

• Optional in-stock blinds

Factory installed in-stock blinds


If one of the in-stock blinds below are ordered with your skylights, VELUX will factory install your blind for you, or you may select one of our special order blinds. Please visit veluxusa.com to see a listing of special order blinds.

Note: Special order blinds are not pre-installed with your skylight order and require a two week lead time.

In-stock room darkening - double pleated blinds (Solar powered/manual)



In-stock light filtering - single pleated blinds (Solar powered/manual)



In-stock venetian blind (FS and VS only) (Manual)



White

Skylights	vss	VSE	VS	FS/FSR
Solar powered room darkening double pleated blinds				
Solar powered light filtering single pleated blinds	•	•	•	•
Solar powered blackout blinds				
Solar powered light filtering blinds				•
Manual room darkening double pleated blinds				
Manual light filtering single pleated blinds				•
Manual blackout blinds				
Manual light filtering blinds				•
Manual venetian blinds				

Notes:

- On the VS skylight, removal of the insect screen is required to operate or adjust the venetian blind.
- Blinds not available for FS size C12.
- Solar blinds not available for FS A06 size.

Electric "Fresh Air" skylight – Model VSE

- Optional in-stock blinds available factory installed.
- Included with your skylight is the intelligent touch remote control powered by VELUX INTEGRA[®]. Comes with preprogrammed settings for ease of use.
- Single hard wire connects into a standard junction box.

Wall mounted keypad and interface to home automation systems are available.



skylight – Model FSR

- Optional in-stock blinds available factory installed
- 2.75-in. larger deck seal to span wider for less accurate openings.
- No drywall groove to match existing construction - simply trim the drywall to the openina.


Federal tax credit on solar powered blinds* 30% Available in room darkening - double pleated blinds,

Fixed replacement



(3) VSS M08 Solar Powered "Fresh Air" Skylights Blind: 4558 Blackout blind

Deck mounted skylight size chart (Rough openings)

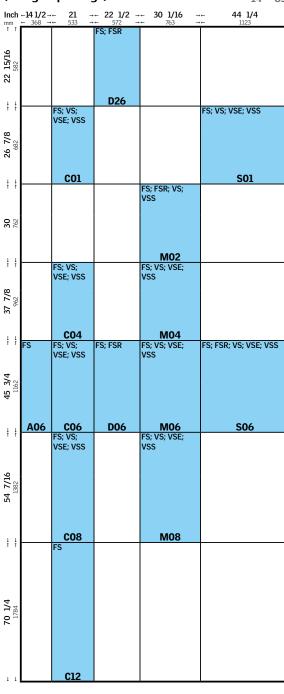

Deck mounted skylight flashing

Model	Installation	Roofing	
EDL	Single	Shingle/Slate (14°- 85° roof pitch)	
EDW	Single	Tile (14°- 85° roof pitch)	
EDM	Single	Metal (14°- 85° roof pitch)	
EKL	Gang	Shingle/Slate (14°- 85° roof pitch)	
EKW	Gang	Tile (14°- 85° roof pitch)	
ECB*	Low pitch; single	Site built curb (14°- 85° roof pitch)	

* Does not come with VELUX adhesive skylight underlayment, and is not covered by the No Leak warranty.

VELUX®

VELUX America Inc.

FSR sizes (Rough openings)

Size code		D26	D06	M02	S06
Outside frame	in.	23 ¹ / ₄ x 23 ⁷ / ₁₆	23 ¹ / ₄ x 46 ¹ / ₄	30 %/16 x 30 1/2	44 ³ / ₄ x 46 ¹ / ₄
Rough opening	in.	$22\frac{1}{2} \times 22\frac{15}{16}$	22 ¹ / ₂ x 45 ³ / ₄	30 ¹ / ₁₆ x 30	44 ¹ / ₄ x 45 ³ / ₄
Ideal fit Width	in.	21 ¹ / ₈ - 22 ³ / ₈	21 ¹ /8-22 ³ /8	28 ¹ / ₂ -29 ³ / ₄	42 ³ / ₄ - 44
Ideal fit Height	in.	21 ¹ / ₂ - 22 ³ / ₄	44 ¹ / ₄ -45 ¹ / ₂	28 ¹ / ₂ - 29 ³ / ₄	44 ¹ / ₄ - 45 ¹ / ₂

Note: In general, the FSR allows a finished opening variance of 2" on the width and height for an ideal fit where the front of the drywall will be under the white skylight frame. An additional 2" in width and height variance will allow the skylight to fit the opening, but additional trim will be required.

Choosing the right glass for your skylight

For out of reach applications



Clean, Quiet & Safe glass (xxO4) - recommended

Standard on: VSS,VSE Available on: VS, FS

Clean, Quiet & Safe glass also available in the following options:



Impact (xx06) Available on: VSS, VSE, VS, FS

Snowload (xx10)

Available on: VSE, VS, FS



Clean

Features Neat[®] glass coating to keep your skylight cleaner longer, leaving skylights virtually spotless



Quiet

Reduce unwanted outside noise by up to 25% less than a standard double pane glass, and up to 50% less than a plastic skylight

Available on: FS, VS, QPF

Dual pane tempered glass (xx05)

Safe VELUX recommends and building codes require laminated glass for out of reach applications

8′

For in reach applications





www.facebook.com/veluxamerica www.twitter.com/veluxamerica www.youtube.com/veluxusa